

12V/24V LCD with USB Charge controller




Batt voltage	12V/24V auto			48V	
Charge current	10A	20A	30A	10A	20A
Discharge current	10A	20A	30A	10A	20A
Max Solar input	<50V			<80V	
Equalization	B01 sealed		B02 Gel	B03 flood	
	14.4V		14.2V	14.6V	
Float charge	13.7V(default,adjustable)				
Discharge stop	10.7V(default,adjustable)				
Discharge reconnect	12.6V(default,adjustable)				
USB output	5V/3A				
Self-consume	<10mA				
Operating temperature	-35~+60 ℃				
Size/Weight	150*78*35mm /150g				

NB: Always connect battery first



LCD DISPLAY/KEY

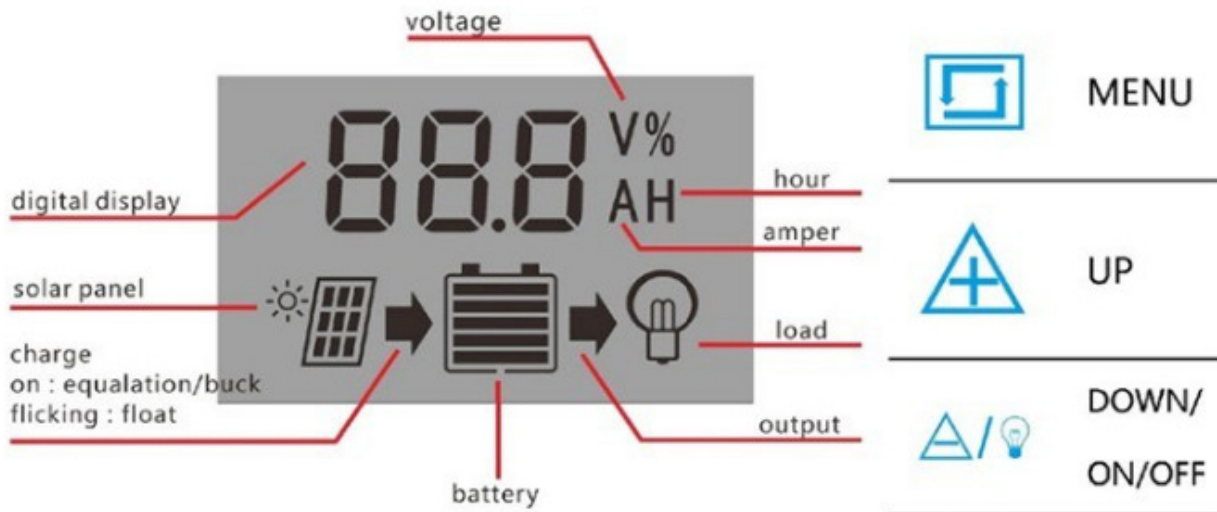

MENU : switch between different display , or to enter/exit setting by long press.

UP : press to increase value.

DOWN:press to decrease value.